

# Technical Specification

REF: PC20

ISS: 1

## Key Features

- 3 Function Lamp
- 24 Volt Operation
- LED Long Life Reliability
- Unique Triangular Design
- Housing Option for Combination Ass'y

## Technical Specification

**Functions:** Tail | Indicator | Stop

**Homologation:** ECE

**Voltage:** 24 Volt

**Power Consumption:** Stop 1.8W

Rear Position 0.23W

Indicator 2.0W

**Connection:** Cable 500mm

**Fixing:** M6 Bolt

**IP Rating:** IP67 Hermetically Sealed

**Material:** Lens – PMMA | Body - Poly Carbonate / ABS

**Temperature Range:** -40°C to +50°C

## Part Numbers

PL.100.S.05 24 Volt Stop | Rear Position | DI

## See Also

100 Series	Fog   Reverse   Rear Position Module
100 Series	3 Position Housing
100 Series	Combination Lamp

## 100 Series – Combination Lamp




## Overview

Unique Design Triangular Lamp with Long Life LED light source incorporating Stop, Rear Position & Indicator Operation.

Designed with a styling theme common to the Fog, Reverse and Rear Position Lamp module from the 100 Series Triangular Range.

Can also be incorporated within the Modular Housing Part No: PL.100.A.02

## Drawing

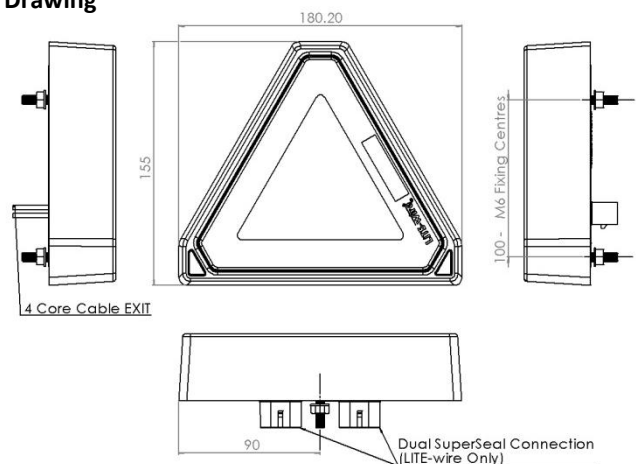

[www.perei.co.uk](http://www.perei.co.uk) | [sales@perei.co.uk](mailto:sales@perei.co.uk) | +44 (0) 1842 812290

Perei Group Limited | Keystone Innovation Centre | Thetford | Norfolk | IP24 1JD | United Kingdom

Specifications herein are subject to change without notice

**PEREI**