

Technical Specification

REF: PC8

ISS: 1

Key Features

- LED Combination Lamp – 5 Function
- Integral Triangle Reflector
- IP67 Hermetically Sealed
- Integral Indicator Ballast Loading Option
- LED Long Life Reliability

Technical Specification

Functions: Stop | Indicator | Position | Reflex | Reverse | Fog

Homologation: ECE

Voltage: 10 – 30 Volts DC or 24 Volt Only (Ballast Option)

Power Consumption :	Stop	3.0w
	Rear Position	1.0w
	Indicator	3.0w
	Fog	4.0w
	Reverse	3.0w

Connection : Cable 500mm or Din Plug Option

Fixing : M6

IP Rating : IP67 Hermetically Sealed

Material : Lens PMMA | Housing PC

Temperature Range : -40°C to +50°C

Part Numbers

PL.350.S.01	LH	10-30 Volts DC	DIN Connection
PL.350.S.02	RH	10-30 Volts DC	DIN Connection
PL.350.S.03	LH	10-30 Volts DC	500mm Cable
PL.350.S.04	RH	10-30 Volts DC	500mm Cable
PL.350.S.05	LH	24 Volts DC (Load + Cable 500mm)	
PL.350.S.06	RH	24 Volts DC (Load + Cable 500mm)	

See Also

350 Series LED Multi-Function Combination Lamp




Overview

5 Function LED Combination Rear Lamp including a Triangular Reflector with a High Bright Optical System in a small and stylish package.

Options available for an Integral DIN Plug Connection and LED Power Loading (D.I.) making this product very versatile and suitable for both Small and Large Trailer Applications

Drawing

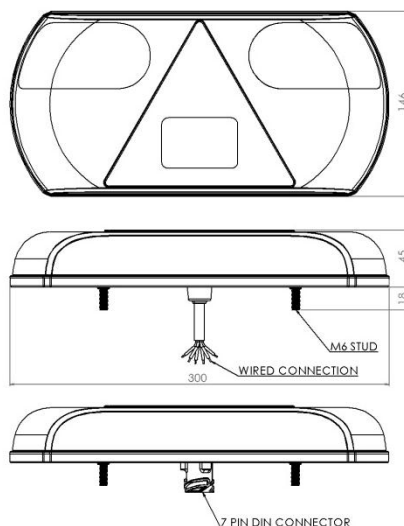

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

Perei Group Limited | Keystone Innovation Centre | Thetford | Norfolk | IP24 1JD | United Kingdom

Specifications herein are subject to change without notice

