

Technical Specification

REF: PF4

ISS: 1

Key Features

- Wired or SuperSeal Connections
- 12 or 24 volt operation
- Cost Effective LED Lighting
- Popular 95mm Package

Technical Specification

Functions: Fog

Homologation: ECE

Voltage: 12v | 24v

Power Consumption : Fog (12v) 3.79w, (24v) 3.72w

Connection : Cable 150mm or SuperSeal

Fixing : M4 Bolt

IP Rating : IP67

Material : Lens – PMMA | Housing – ABS/Polycarbonate

Temperature Range : -40°C to +50°C

Part Numbers

RF7LED12v – Rear Fog LED 12 Volt Wired

RF7LED24v – Rear Fog LED 24 Volt Wired

RF7LEDSS12V – Rear Fog LED 12 Volt with SuperSeal

RF7LEDSS24V – Rear Fog LED 24 Volt with SuperSeal

RF7LED12V - CLR – Rear Fog LED 12 Volt with Clear Lens

RF7LED24V - CLR – Rear Fog LED 24 Volt with Clear Lens

See Also

95mm LED Stop/Tail | Reverse | Indicator | 95mm Plinth

95mm LED Fog Lamp




Overview

95mm LED is a direct replacement for a 95mm bulb lamp, available as: Stop/Tail, Rear Fog, Reverse, Front Direction Indicator Rear Direction Indicator.

Supplied in a popular 95mm package, available with a choice of wired or SuperSeal connection

Drawing

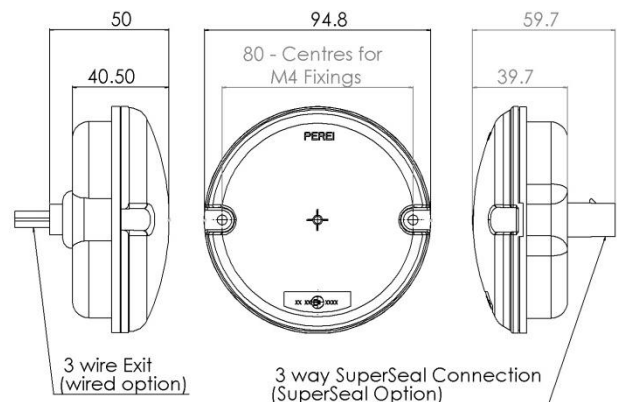

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

Perei Group Limited | Keystone Innovation Centre | Thetford | Norfolk | IP24 1JD | United Kingdom

Specifications herein are subject to change without notice

PEREI