

Technical Specification

REF: PST4

ISS: 2

Key Features

- 'Signature' Ring Design
- Coloured Bezel Option
- Low Current Draw
- Popular 95mm Fitment

Technical Specification

Functions: Stop/Tail

Homologation: ECE

Voltage: 12V | 24V

Power Consumption: Stop (12V) 1.5W, (24V) 2.0W
Tail (12V) 1.0W, (24V) 1.0W

Connection: Cable 500mm

Fixing: 3 Point M4 Screw

IP Rating: IP67

Material: Lens – PMMA | Housing – ABS/Polycarbonate

Temperature Range: -40°C to +85°C

Part Numbers

ST105SZZ-2-2-AA 12v Stop/Tail 95mm LED Ring – Clear

ST105SZZ-4-2-AA 24V Stop/Tail 95mm LED Ring – Clear

ST106SZZ-2-2-AA 12v Stop/Tail 95mm LED Ring – Red

ST106SZZ-4-2-AA 24v Stop/Tail 95mm LED Ring – Red

ST106T1-2-2-AA 12v Stop/Tail 95mm LED Ring – Red Lens Black Bezel

ST106T1-4-2-AA 24v Stop/Tail 95mm LED Ring – Red Lens Black Bezel

ST105T1-2-2-AA 12v Stop/Tail 95mm LED Ring – Clear Lens Black Bezel

ST105T1-4-2-AA 24v Stop/Tail 95mm LED Ring – Clear Lens Black Bezel

See Also

95 mm LED Ring Direction Indicator
55mm range of lamps
122mm reflector

95mm LED Ring Stop/Tail




Overview

95mm LED Ring available as: Stop/Tail, Direction Indicator.
Popular 95mm Fitment, available with clear and coloured lens options.

For use with Perei 55mm LED signal lamps & 122mm Reflex Reflector.

Drawing

Insulation Colour	Function/Signal
Red (+VE)	Stop
Brown (+VE)	Tail
White (-VE)	Ground

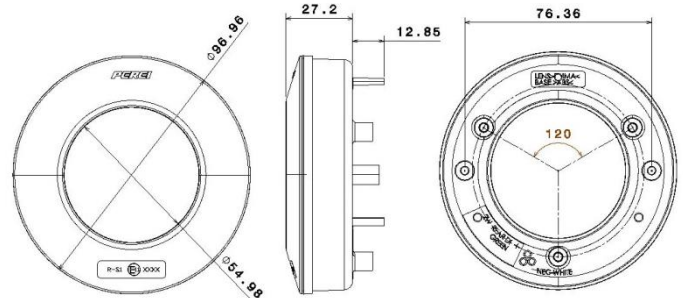

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

Perei Group Limited | 36 Wimbledon Avenue | Brandon | Suffolk | IP27 0NZ | United Kingdom

Specifications herein are subject to change without notice

PEREI